


A Typical Home or Small Business Network

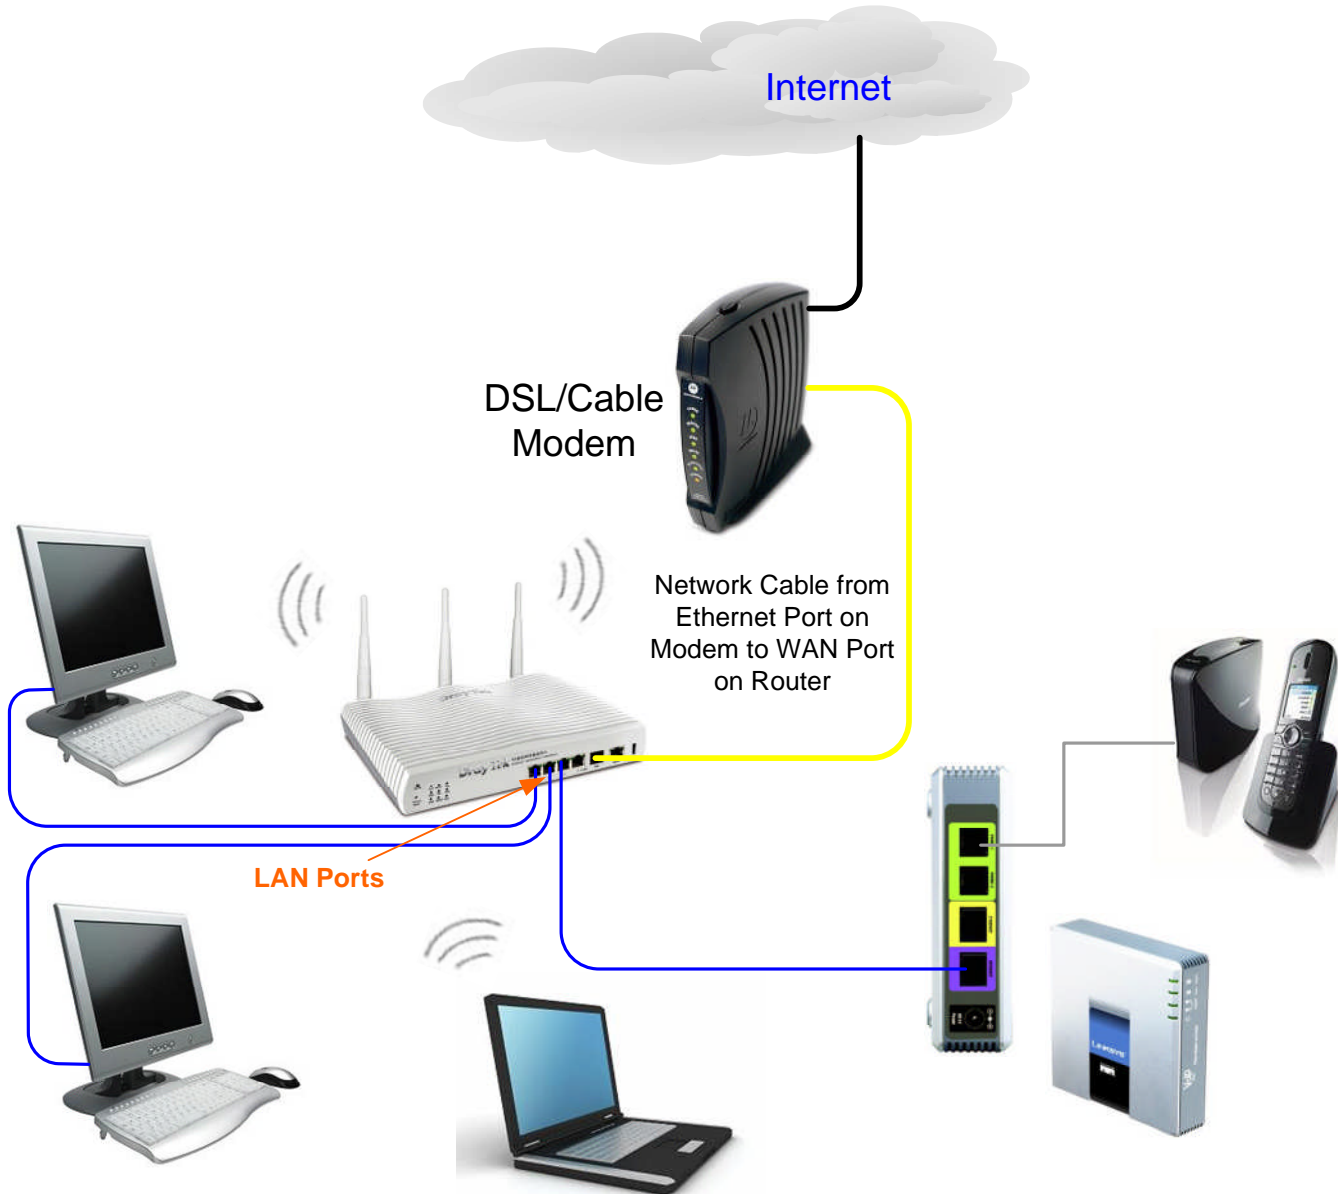

Connecting the Linksys ATA (Analog Telephone Adaptor) to your network.

Connect the provided network cable from an available LAN Port (typically ports 1,2,3 or 4) on your router to the Internet port (blue) on the Linksys ATA. Connect a standard corded or cordless home telephone to port one (phone one) on the ATA. Once everything is connected, apply power to the Linksys ATA and within 5 minutes the ATA should indicate internet connectivity and there should be dial tone on your phone. Place and receive calls as you normally would.